

# K&M Under Roof Gutter Screen

Combining the strength of a solid gutter helmet with the ability to capture water in heavier rains due to our offset hole design and wire screen skin.

Angle the screen for installation or bend the back to match the pitch. The offset slots make this a weaker spot that allows for it to be hand bent

Back portion to be tucked under the roof shingles, tile or slate

1/2" x 2" Offset hole

Stainless steel micro mesh keeps leaves and most debris out while allowing water to pass through

Mesh not shown for the purpose of better displaying offset holes

Flexible portion can be hand bent to match roof pitch

Joggle bends help slow down water in heavy rains

Stainless Steel Mesh

Nominal size: 26x26  
Wire diameter: ~0.0075"  
Opening size: ~0.031"  
Open area: ~64%

Profile changes to accommodate Euro Bead Gutters

not to scale




1310 E. Cornwallis Rd.  
Durham, NC - 27713  
(919) 544-8887 - Fax: 544-8898  
info@kmsheetmetal.com - www.kmsheetmetal.com

K&M Under Roof Gutter Screen

Available in 5' Lengths

REVISIONS	
MM/DD/YY	REMARKS
1	ORIGINAL DRAFT OF DRAWING
2	
3	
4	
5	

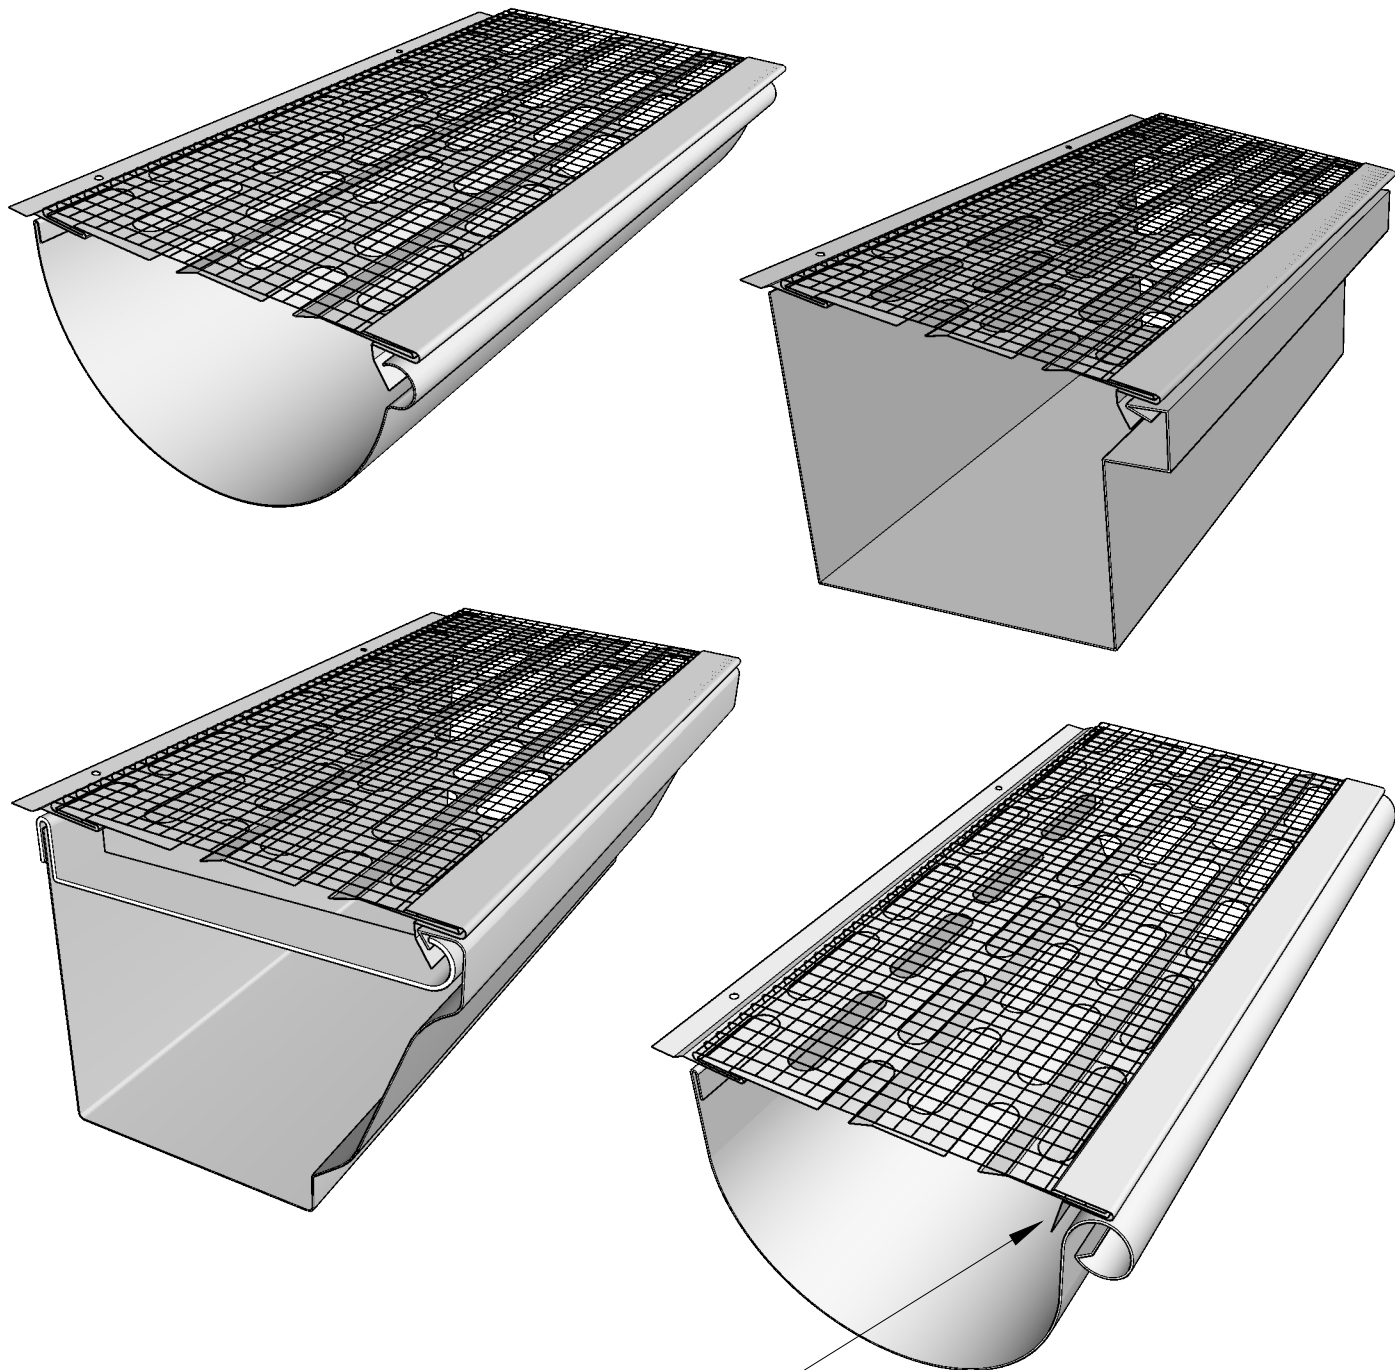

Fastening to the front portion of a gutter is recommended but optional for all gutter profiles where the front edge of the gutter screen hooks into place like a hanger. On Euro bead gutters, the profile does not allow for a hook, therefore fastening is strongly recommended.

### Standard Materials:

Copper, Aluminum & Steel.  
May also be manufactured in other materials.  
Please contact us for a quote.



1310 E. Cornwallis Rd.  
Durham, NC - 27713  
(919) 544-8887 - Fax: 544-8898  
info@kmsheetmetal.com - www.kmsheetmetal.com

K&M Under Roof Gutter Screen

Available in 5' Lengths

REVISIONS	
MM/DD/YY	REMARKS
1	ORIGINAL DRAFT OF DRAWING
2	
3	
4	
5	

100  
0